


Data Sheet | Item Number: 787-1675

Switched-mode power supply with integrated charger and controller; Classic; 1-phase; 24 VDC output voltage; 5 A output current; communication capability

<https://www.wago.com/787-1675>

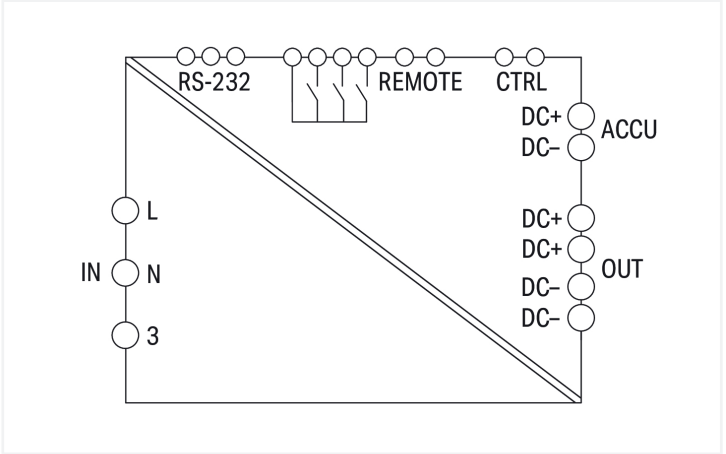

Features:

- Switched-mode power supply with integrated charger and controller for uninterruptible power supply (UPS)
- Battery control technology for smooth charging and predictive maintenance applications
- Potential-free contacts provide function monitoring
- Buffer time can be set on site via rotary switch
- Parameter setting and monitoring via RS-232 interface
- Natural convection cooling when horizontally mounted
- Encapsulated for use in control cabinets
- Electrically isolated output voltage (SELV) per EN 60950-1/UL 60950-1; PELV per EN 60204

Technical data			
Input		Output	
Nominal input voltage $U_{i\text{nom}}$	100 ... 240 VAC	Nominal output voltage $U_{o\text{nom}}$	24 VDC (SELV)
Input voltage range	85 ... 264 VAC; 120 ... 372 VDC	Output voltage range	23 ... 28.5 VDC (mains operation); 18.5 ... 27.5 VDC (buffer mode)
Input voltage derating	-1.5 %/V (< 110 VAC); -1 %/V (< 150 VDC)	Nominal output current $I_{o\text{nom}}$	5 A
Nominal mains frequency range	44 ... 66 Hz; 0 Hz	Nominal output power	120 W
Input current I_i	≤ 1.1 A (230 VAC; 5 ADC); ≤ 2.2 A (110 VAC; 5 ADC)	Deviation	≤ 1 %
Discharge current	≤ 1 mA	Residual ripple	≤ 50 mV (peak-to-peak)
Inrush current	≤ 30 A	Current limitation	$1.1 \times I_{o\text{nom}}$ (typ.); TopBoost
Power factor correction (PFC)	Passive	Overload behavior	Constant current
Energy storage systems		Signaling and communication	
Buffer time	1 s ... 20 min or constant; PC mode; configurable via software	Signaling	1 x Alarm LED (red) 1 x Battery charge LED (yellow) 1 x DC OK LED (green) 3 x Signal output (24 VDC; max. 200 mA in total) 1 x RS-232 interface
Switch-on threshold	DC 20 ... 25.5 V (Adjustable via software; pre-configured: 22 VDC)	Operation status indicator	Green LED (DC OK) Yellow LED (battery mode) Red LED (alarm)
Memory type	Lead-acid fleece	Communications	RS-232 serial interface
Charging current	0.3 ... 1 A	Remote input	Switching buffer mode off
End-of-charge voltage	26 ... 29.5 VDC (temperature-controlled; optional fixed setting)		
Recommended battery module	787-871, 787-872, 787-873, 787-876, 787-1671		



Efficiency/power losses	
Power loss P _I	≤ 5.2 W (Buffer mode; 24 VDC; 5 A); ≤ 17 W (Mains operation; 230 VAC; 24 VDC; 5 A); ≤ 22 W
Power loss (max.) P _{I (max.)}	30 W (90 VAC; charging process)
Efficiency (typ.)	88 %

Circuit protection	
Internal fuse	T 4 A / 250 VAC (input side)
Pre-fuse (required)	An external DC fuse is required for the DC input voltage.
Backup fuse (recommended)	Circuit breaker: 6 A, 10 A, 16 A; Tripping characteristic: B or C

Safety and protection	
Isolation voltage (pri.-sec.)	DC 4.242 kV
Isolation voltage (pri.-PE)	DC 2.2 kV
Isolation voltage (sec.-PE)	0.7 kVDC
Protection class	I
Protection type	IP20; Per EN 60529
Reverse voltage protection	Yes
Resistance to reverse feed	≤ 35 VDC
Overvoltage category	II
Pollution degree	2
Transient suppression (primary)	Varistor
Overvoltage protection; secondary	Internal protective circuit ≤ 38 VDC (in the event of a fault)
Parallel operation	Yes, up to 3 battery modules for extending the buffer time
Series operation	No
MTBF	> 500,000 h (per IEC 61709)

Connection data	
Cable length (max.)	3 m (Output, battery control)
Connection 1	
Connection type	Input/output/signaling
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 721 Series
Solid conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Fine-stranded conductor	0.08 ... 2.5 mm² / 28 ... 12 AWG
Strip length	8 ... 9 mm / 0.31 ... 0.35 inches

Connection 2	
Connection type	Interface
Connection technology	CAGE CLAMP®
WAGO connector	WAGO 734 Series
Solid conductor	0.08 ... 1.5 mm² / 28 ... 14 AWG
Fine-stranded conductor	0.08 ... 1.5 mm² / 28 ... 14 AWG
Strip length	6 ... 7 mm / 0.24 ... 0.28 inches

Physical data	
Width	60 mm / 2.362 inches
Height	127 mm / 5 inches
Depth from upper-edge of DIN-rail	135.5 mm / 5.335 inches



Mechanical data		
Mounting type		DIN-35 rail

Material data		
Fire load		0.617 MJ
Weight		885 g

Environmental requirements		
Ambient temperature (operation)		-25 ... +70 °C (Device starts at -40 °C (type-tested))
Ambient temperature (storage)		-25 ... +85 °C
Relative humidity		5 ... 96 % (no condensation permissible)
Derating		-3 %/K (> 50 °C)
Climatic category		3K3 (per EN 60721)

Standards and specifications		
Conformity marking		CE
Standards/specifications		EN 61010-1 EN 61010-2-201 EN 61204-3 EN 61558-2-16 UL 60950 UL 508 DNV

Commercial data		
Product Group		6 (INTERFACE ELECTRONIC)
PU (SPU)		1 pcs
Packaging type		Box
Country of origin		DE
GTIN		4050821502616
Customs tariff number		85044083900

Product Classification		
UNSPSC		39121004
eCl@ss 10.0		27-04-07-01
eCl@ss 9.0		27-04-07-01
ETIM 9.0		EC002540
ETIM 8.0		EC002540
ECCN		NO US CLASSIFICATION

Environmental Product Compliance		
RoHS Compliance Status		Compliant,No Exemption



Approvals / Certificates

General approvals



Approval	Standard	Certificate Name
UL Underwriters Laboratories Inc.	UL 508	E255817
UR Underwriters Laboratories Inc.	UL 60950-1	E255815

Declarations of conformity and manufacturer's declarations

Approval	Standard	Certificate Name
EU-Declaration of Confor- mity WAGO GmbH & Co. KG	-	-

Approvals for marine applications



Approval	Standard	Certificate Name
DNV DNV Germany GmbH	DNVGL-CG-339,Dec.2019	TAA00002YC

Downloads

Environmental Product Compliance

Compliance Search
Environmental Product Compliance 787-1675



Documentation

Manual
Product Manual Primary Switch Mode Power Supply with Integrated UPS Charger and Con- troller

V 1.0.0

pdf
3133.43 KB



Quick-Start Guide
Quickstart for Software 759-870

V 1.0.0

pdf
3043.43 KB



Bid Text
787-1675
12.07.2019
xml 9.33 KB
787-1675
12.07.2019
docx 23.28 KB
ausschreiben.de 787-1675



Instruction Leaflet
Primär getaktete Stromversorgung mit integrierter USV Lade- und Kontrolleinheit
05.05.2020
pdf 247.29 KB





CAD/CAE-Data	
CAD data	CAE data
2D/3D Models 787-1675	EPLAN Data Portal 787-1675
	WSCAD Universe 787-1675
	ZUKEN Portal 787-1675

Engineering-Software			
Configuration and Commissioning Software			
WAGO Software 759-870	4.13 10.05.2021	zip 38762.69 KB	

1 Compatible Products
1.1 Optional Accessories
1.1.1 Cables and connectors
1.1.1.1 Communication cable



Item No.: 787-892
RS-232 communication cable; Length 1.8 m; for 0787-1675

1.1.1.2 Connecting cable



Item No.: 761-9005
USB adapter; with 1m connection cable

1.1.2 Marking
1.1.2.1 Marking strip



Item No.: 210-831
Marking strips; on reel; 2.3 mm wide; plain; Self-adhesive; white



Item No.: 210-832
Marking strips; on reel; 3 mm wide; plain; Self-adhesive; white



1.1.3 Mounting adapter

1.1.3.1 DIN-rail adapter



Item No.: 787-897/000-010
Carrier rail adapter made of zinc die-cast;
horizontal mounting of 787-16xx (TS35)

1.1.4 Power supply

1.1.4.1 Uninterruptible power supply



Item No.: 787-871
Lead-acid AGM battery module; 24 VDC
input voltage; 20 A output current; 3.2 Ah
capacity; with battery control



Item No.: 787-873
Lead-acid AGM battery module; 24 VDC
input voltage; 40 A output current; 12 Ah
capacity; with battery control



Item No.: 787-872
Lead-acid AGM battery module; 24 VDC
input voltage; 40 A output current; 7 Ah
capacity; with battery control



Item No.: 787-1671
Lead-acid AGM battery module; 24 VDC
input voltage; 5 A output current; Capaci-
ty: 0.8 Ah; with battery control



Item No.: 787-876
Lead-acid AGM battery module; 24 VDC
input voltage; 7.5 A output current; 1.2 Ah
capacity; with battery control

1.1.5 Tool

1.1.5.1 Operating tool



Item No.: 210-719
Operating tool; Blade: 2.5 x 0.4 mm; with a
partially insulated shaft



Item No.: 210-720
Operating tool; Blade: 3.5 x 0.5 mm; with a
partially insulated shaft; multicoloured



Item No.: 210-769
SCREWDRIVER; green